



PB TRANSPARENTES LED POSTER

Model	Transparent LED Poster
Pixel Pitch (mm)	P 3,91 – P 10
Cabinet Material	Aluminum
Size (W×H×D) (mm)	1000 × 2000 × 70
Weight of Cabinet (kg)	26
Resolution (Dot)	100 × 511
Brightness (cd)	5500
Refresh Rate (Hz)	>1920
Max Consumption (W/m ²)	650
Avg Consumption (W/m ²)	200
Input Voltage (V)	AC 100 ~ 240
Working Temperature (°C)	- 30 ~ 70
Working Humidity (%) (No condensation)	10 ~ 85
Storage Temperature (°C)	- 40 ~ 85
Storage Humidity (%) (No condensation)	10 ~ 85
Garantie	2 Jahre

* Bei den Parametern handelt es sich um Standardwerte, welche individuell an die Anforderungen angepasst werden können.

MODUL TRANSPARENTES LED POSTER



**SCHNELLE
INSTALLATION**



**EASY-TO-CONNECT
(EINFACHES
STECKSYSTEM)**



**EINFACHE
WARTUNG**



**SMART
CONNECTION
(STEUERUNG)**

FRAG' PHILIPP!

0421 83570130

kontakt@pixelbeast.de


www.pixelbeast.de





PIXXELBEAST

- 75 % Transparenz
- Flexibel anwendbar
- Fortschrittliche Bildtechnologie
- Hohe Kontrastrate
- Hängende Montage oder Stand-Alone-Montage möglich
- Perfektes Temperaturmanagement
- Lange Lebensdauer

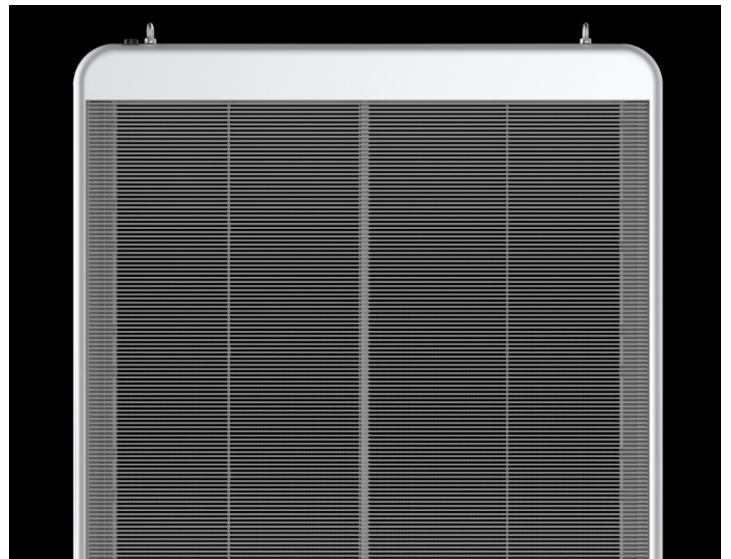

FRAG' PHILIPP!

0421 83570130

kontakt@pixxelbeast.de

www.pixxelbeast.de



Sicherheitshinweise:

- Von leitenden Gegenständen fernhalten!
- Aufbau und Wartung dürfen nur von Elektrofachkräften durchgeführt werden!
- Bei Störung sofort abschalten!
- Nicht mit bloßen Händen berühren!



Reinigungshinweise:

- Nicht feucht/nass abwischen
- LED-Display nicht direkt mit einem Tuch reinigen
- Nur trocken und vorsichtig reinigen