



PB TRANSPARENT LED POSTER

Model	Transparent LED Poster
Pixel Pitch (mm)	P 3,91 – P 10
Cabinet Material	Aluminum
Size (W×H×D) (mm)	1000 × 2000 × 70
Weight of Cabinet (kg)	26
Resolution (Dot)	100 × 511
Brightness (cd)	5500
Refresh Rate (Hz)	>1920
Max Consumption (W/m ²)	650
Avg Consumption (W/m ²)	200
Input Voltage (V)	AC 100 ~ 240
Working Temperature (°C)	- 30 ~ 70
Working Humidity (%) (No condensation)	10 ~ 85
Storage Temperature (°C)	- 40 ~ 85
Storage Humidity (%) (No condensation)	10 ~ 85
Warranty	2 years

*Above parameters are typical values, which are adjustable according to different project requirements.

MODULE TRANSPARENT LED POSTER



**SIMPLE
INSTALLATION**



**EASY-TO-CONNECT
(PLUG-IN SYSTEM)**



**FRONT
MAINTENANCE**




**SMART
CONNECTION
(CONTROL SYSTEM)**

ASK PHILIPP!

+49 421 83570130
kontakt@pixxelbeast.de
www.pixxelbeast.de



- 75 % transparency
- Flexible usage
- High contrast and high clarity
- Hanging mounting or stand-alone-mounting available
- Perfect heat control
- Long lifetime

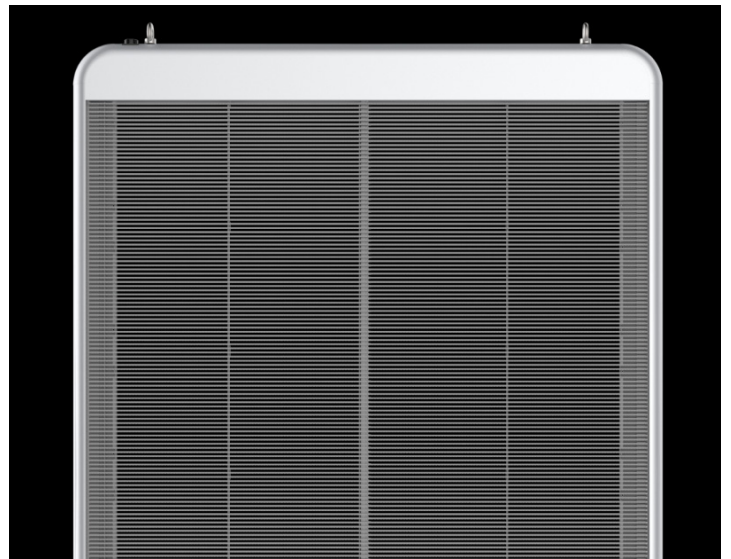

ASK PHILIPP!
 +49 421 83570130
 kontakt@pixxelbeast.de
 www.pixxelbeast.de



- Safety:**
- The product is conductive - please keep away from power sources!
 - Installation and maintenance may only be carried out by qualified electricians!
 - Switch off the display by technical difficulties!
 - Don't touch without gloves!



- Cleaning:**
- Do not clean the display with water
 - Do not clean the display directly with a cleaning rag
 - Clean dry and carefully