

## PB VISION LED-DISPLAY

Model	Vi-3.9	Vi-4.9	Vi-6.4	Vi-10
Pixel Pitch (mm)	3.9	4.9	6.4	10
Pixel Configuration	SMD			
Resolution of Module (pixels) (WxH)	80 x 60	64 x 48	60 x 60	40 x 40
Size of Module (WxH) (mm)	318 x 238.5		384 x 384	400 x 400
Weight (kg)	26		23	
Power Consumption Max / Avg. (W)	600 / 185		550 / 185	
Brightness (cd/m²)	>6000 nits			
Contrast Ratio	>4000 : 1		>6500 : 1	
Viewing Angle	120° / 120°		110° / 45°	
IP Rating	66			
Grey Level (Bit)	16			
Refresh Frequency (Hz)	3840			
Operating Temperature (°C)	-40° ~ 55°			
Operating Humidity (%)	10 ~ 90			
Warranty	2 years			

\* Parameters above are typical values, which may be adjusted according to actual project requirements.

### MODULE VISION



**SIMPLE  
INSTALLATION**



**EASY-TO-CONNECT  
[PLUG-IN SYSTEM]**



**FRONT  
MAINTENANCE**




**SMART  
CONNECTION  
[CONTROL SYSTEM]**

### ASK US!

+49 421 83570130  
kontakt@pixxelbeast.de  
[www.pixxelbeast.de](http://www.pixxelbeast.de)



- Flexible sizes possible
- Various mounting options (wall mounting, free-standing, hanging, etc.)
- Pixel Pitch: 3.9, 4.9, 6.4, 10
- Slim design

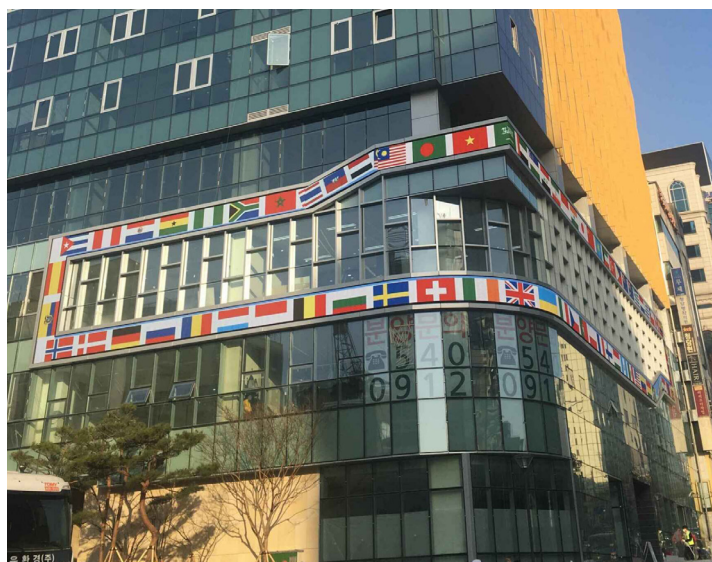

- Automatic brightness adjustment by light sensor
- High refresh rate
- weatherproof
- IP66
- Ideal for stadiums, building facades and much more



## ASK US!

+49 421 83570130  
kontakt@pixxelbeast.de  
[www.pixxelbeast.de](http://www.pixxelbeast.de)



### Safety:

- The product is conductive - please keep away from power sources!
- Installation and maintenance may only be carried out by qualified electricians!
- Switch off the display by technical difficulties!
- Don't touch without gloves!



### Cleaning:

- Do not clean the display with water
- Do not clean the display directly with a cleaning rag
- Clean dry and carefully